

**SMEC**

# MCV 5700 Series

LM GUIDE TYPE  
VERTICAL MACHINING CENTER

**MCV 5700 Series**

| MCV 5700  
| MCV 5700L

# SMEC

- 1988 - Started as Samsung Heavy Industries Machine Tools Business
- 1989 - Horizontal and vertical machining center technology partnership with OKK Japan
- 1991 - Turning center and vertical machining center technology partnership with Mori Seiki
- 1996 - 5-sided processing center technology partnership with Toshiba
- 1999 - Spun out from Samsung Aerospace Industries and established SMEC Co., Ltd



## High Speed Machining

Highly responsive Roller Type LM Guideways offer superior rapid traverse speeds, reducing non-cutting time while minimizing noise during operation.

## Space Efficiently

The compact design minimizes the required factory floor space maximizing space efficiency

# MCV 5700 Series

## MCV 5700/5700L

### Largest in class X-axis travel and table with low-center of gravity design

- largest in class X-axis travel of 41.34inch(MCV 5700L)
- largest in class table size of 51.19 × 22.45inch(MCV 5700L)
- easy user accessibility with a table surface height of 35.43inch
- with 4 rows of Roller LM-Guides in the Y-axis, overhang is prevented(MCV 5700L)
- high strength and high precision with the highly rigid saddle and arched column design
- maximized space efficiency with the compact design

|                        |      | MCV 5700                   | MCV 5700L                  |
|------------------------|------|----------------------------|----------------------------|
| Travel (X/Y/Z)         | inch | 41.34/22.45/20.48          | 63.00/22.45/20.48          |
| Table size             | inch | 51.19 × 22.45              | 66.93 × 22.45              |
| Table loading capacity | lb   | 2,204.63                   | 2,204.63                   |
| Table surface          | inch | 0.71H8 × P4.93 × 4ea       | 0.71H8 × P4.93 × 4ea       |
| Max. spindle speed     | rpm  | 12,000                     | 12,000                     |
| Tool-to-tool time      | sec  | 1.3(60Hz), 1.6(50Hz)       | 1.3(60Hz), 1.6(50Hz)       |
| Rapid traverse (X/Y/Z) | ipm  | 1,417.33/1,417.33/1,181.11 | 1,181.11/1,417.33/1,181.11 |
| Tool storage capacity  | EA   | 30                         | 30                         |

### Easy Accessibility

The low center of gravity design and minimized gap between the front cover and table edge allows easy load/unload of materials with minimal operator effort and easier machine maintenance


### Operator Convenience

The high performance NC option (S4 package), standard operator-centric OP Panel (15" screen) and eco-friendly coolant system maximizes operator convenience

## MCV 5700 Series

VERTICAL MACHINING CENTER

### High Speed Machining

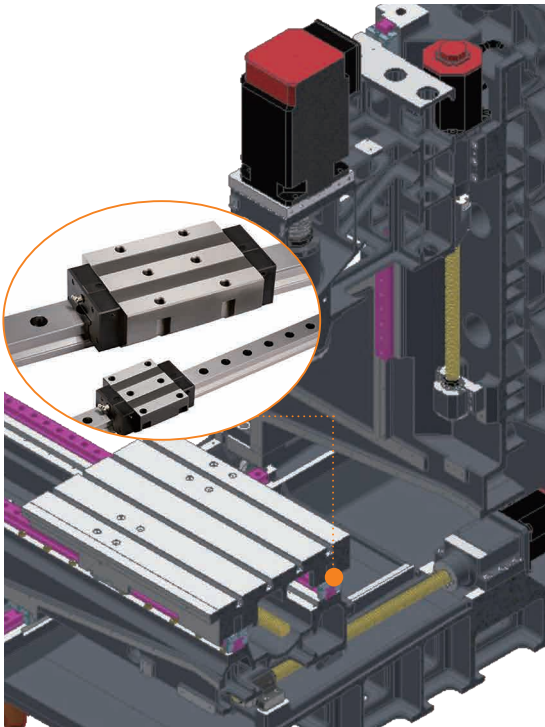

#### Roller type LM guide way

Highly responsive Roller Type LM Guideways offer superior rapid traverse speeds, reducing non-cutting time while minimizing noise during operation.

- high speed, high rigidity, enhanced durability
- compared to Ball Type LM Guides, it offers improved wear resistance, precision travel and product lifetime

#### Rapid traverse (X/Y/Z axis)

MCV 5700 :

**1,417.33/1,417.33/1,181.11 ipm**

MCV 5700L :

**1,181.11/1,417.33/1,181.11 ipm**


### High Performance, High Precision Machining

Designed for superior high precision machining


- Reliable machining supported by stable design
- High precision machining with low vibration and low thermal growth via direct drive spindle

High quality precision provided by low-center of gravity design

- High rigidity single-piece bed with low-center of gravity box design
- Minimized overhang with the widest-in-class roller type LM guideway saddle
- High speed, high precision direct-drive spindle

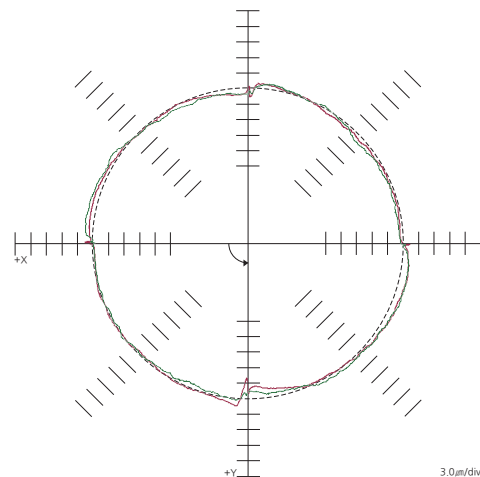

## Superior Accessibility

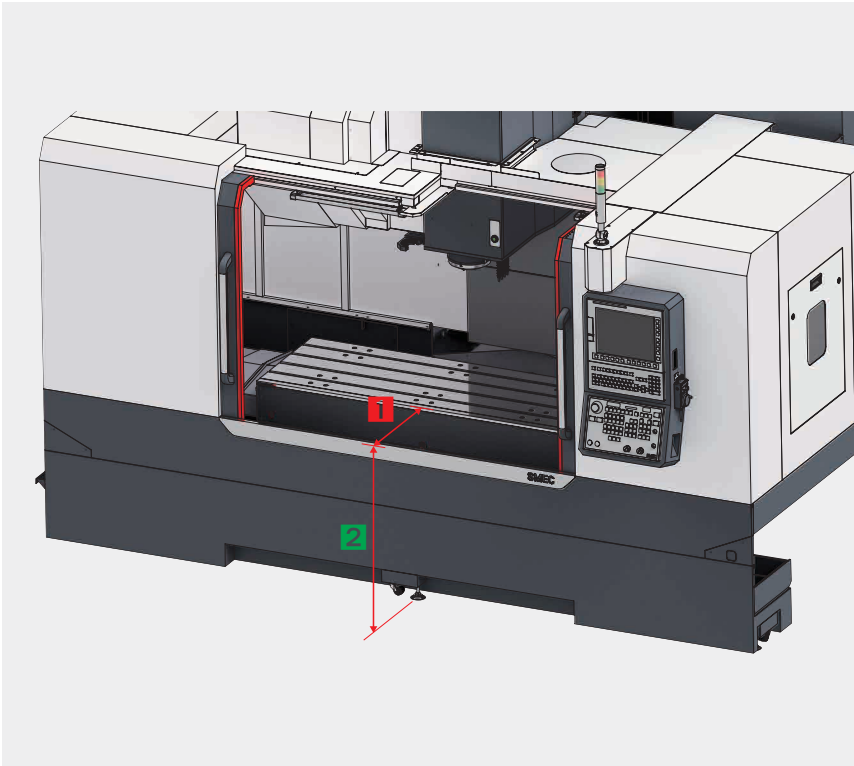

### Superior Accessibility

- with the door opened, a hoist can be brought in past the center point of the table, making it very easy to move heavy materials into the machine
- the distance between the cover and the table was minimized for easy loading/unloading of materials and to allow access to the entire table surface


**1** Distance between front door and table

**8.67**inch

**2** Distance from floor to table top

**35.44**inch

## Operator Convenience

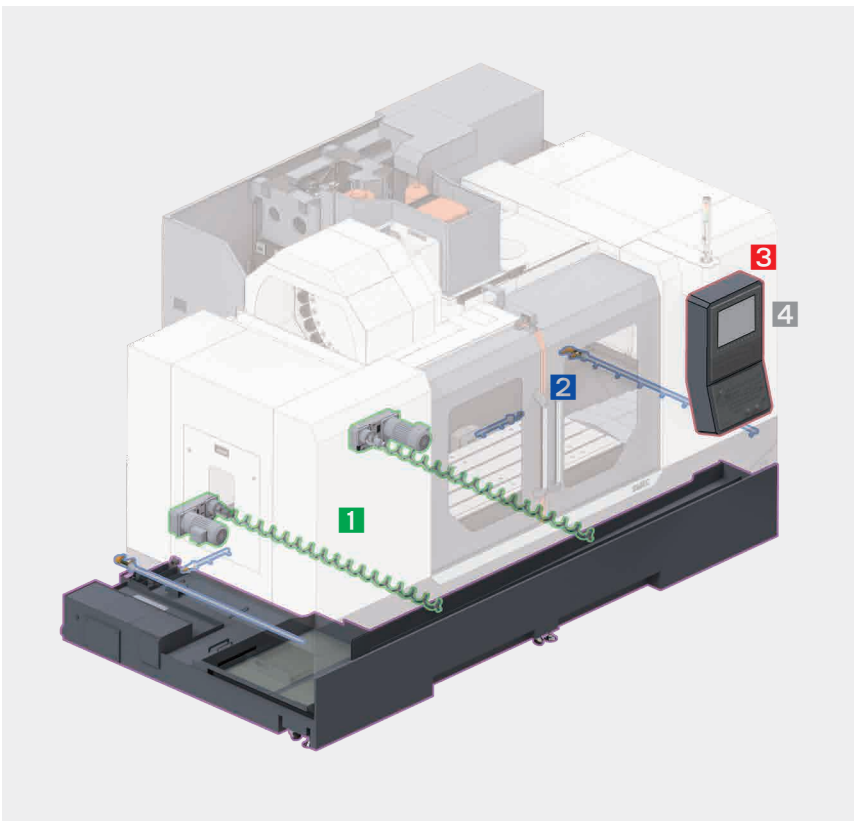

**1** Coil Conveyor

The 2 standard internal coil conveyors efficiently remove the chips that are created during machining

**2** Bed Flushing (MCV 5700L : STD, MCV 5700 : OPT)

The standard bed flush system installed along the sides of the machine prevents chip build-up and ensures effective chip removal

**3** Operator-centric OP Panel

The swivel-type OP Panel is easy to work with and the QWERTY keyboard and high visibility buttons and efficient arrangement improve operator convenience


**4** Machining Performance Enhancing

High Performance NC Options Made Standard The large 15" LCD display, data server and various NC options are made standard to significantly improve machining performance


# MCV 5700 Series

VERTICAL MACHINING CENTER

## Machine Design

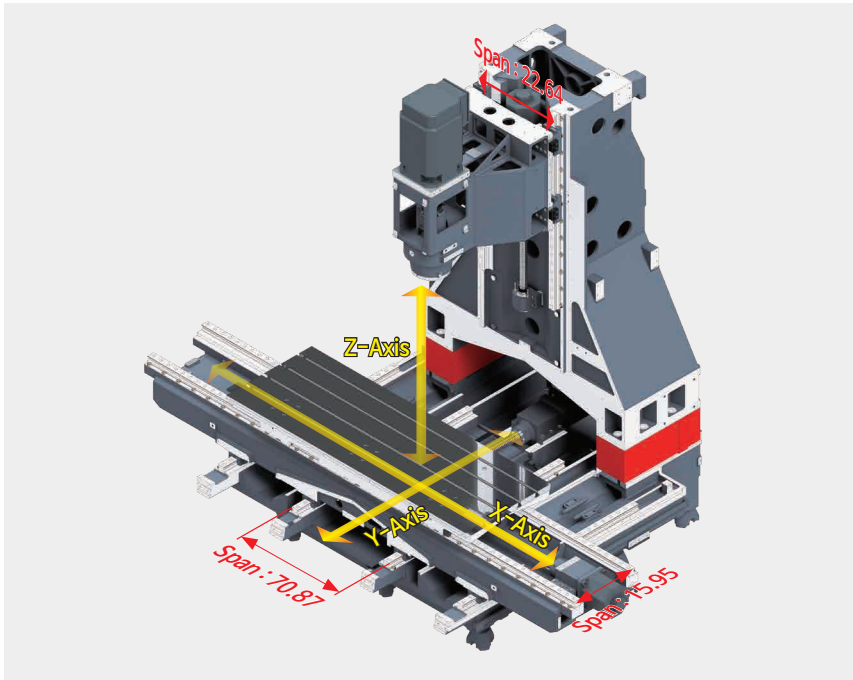

| Model     | Travel (inch) |        |        |
|-----------|---------------|--------|--------|
|           | X-axis        | Y-axis | Z-axis |
| MCV 5700  | 41.34         | 22.45  | 20.48  |
| MCV 5700L | 63.00         | 22.45  | 20.48  |

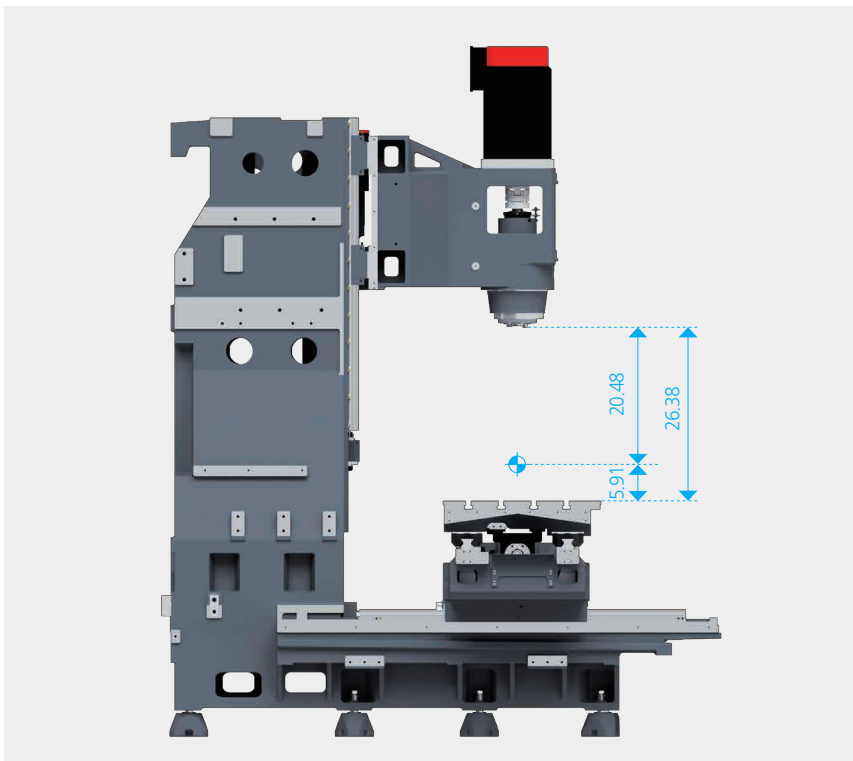

The application of Roller Type LM Guides to all axes minimizes the noise created during travel and the superior accel/decel minimizes the amount of non-cutting time

### Highly Rigid Saddle with no X-axis Overhang

With the largest in class X-axis travel of 1,550mm and highly rigid saddle enables reliable machining of various materials and is suitable for long materials


### 4 Row Y-axis Guide Way Bed

Overhang is minimized with the 4 rows of LM Guides supporting the Y-axis with the widest in class span

### Z-axis High Rigidity Arched Column

The arched column ensures high rigidity and high precision machining performance

### Quill-Type Head stock

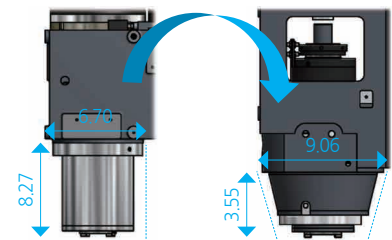

High speed direct drive head  
- high precision and efficient cooling operation

The standard quill-type head enables high speed, ultra precise machining while providing greater rigidity and minimizes thermal growth with forced heat dissipation

### Spindle to table-top distance

**5.91~26.38** inch



High Efficiency Spindle Cooling System (STD)


For long-term high speed continuous operation, an oil cooler may be installed to circulate chilled oil around the spindle bearings to prevent thermal growth in the spindle and allow high precision machining

The ultra precision spindle is supported by 4 rows of P4 class high-speed angular bearings allowing high speed, high precision machining with the direct-coupled head that minimizes thermal growth through forced heat dissipation.

Max spindle speed  
**12,000rpm**

Power(Cont/Max)  
**14.76/29.78HP**

Torque(Cont/Max)  
**51.71/104.30lbs.ft**

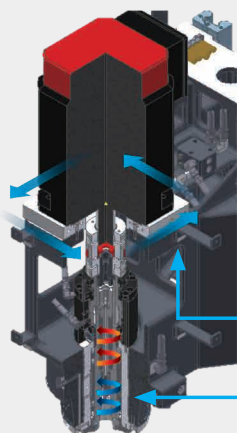

Spindle motor base cooling

Spindle in & out circulation cooling


### JACKET Circulation Cooling

Semi-permanent grease lubrication applied to the bearings, while thermal growth is minimized using jacket circulation cooling around the bearing housing (a source of heat) via a Fan Cooler, ensuring stable performance and extending the lifetime of the spindle.

## MCV 5700 Series

VERTICAL MACHINING CENTER

### ATC / Magazine

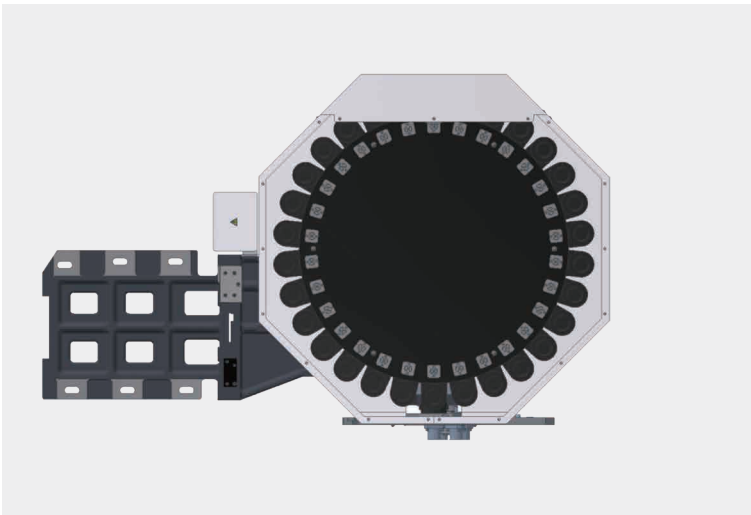

### ATC Magazine

Designed with a standard 30 tool magazine with short travel distance to enable quick tool changes

Fast and errorless tool changes are made possible using the memory random technique and double arm type tool changer, minimizing non-cutting time

Tool storage capacity : **30**ea

Tool-to-tool time : **1.3(60Hz)**secs

Max. tool dia. (adjacent empty) :  
**3.15(4.93)**inch

Max. tool length : **11.82**inch

Max. tool weight : **17.64** lbs

### Table

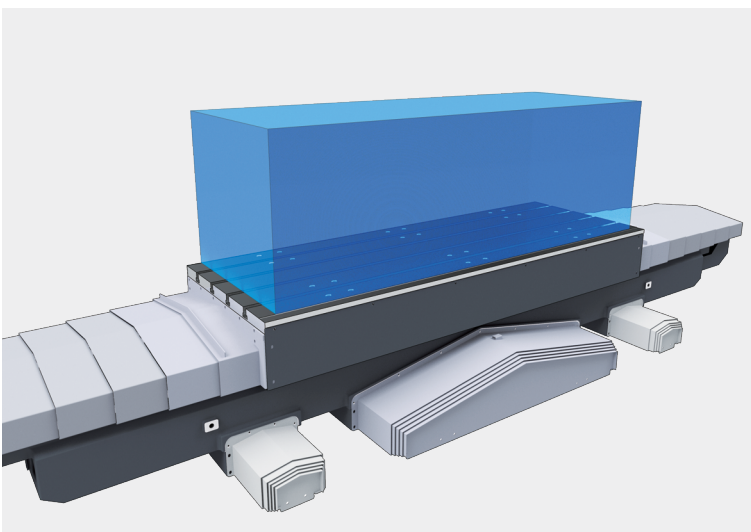


Table size and Table loading capacity were increased to support larger work area


Table size :  
**66.93×22.45**inch

Table surface :  
**0.71H8×p4.93×4**ea

Table loading capacity :  
**2,204.63** lbs



## Eco-Friendly Chip Disposal

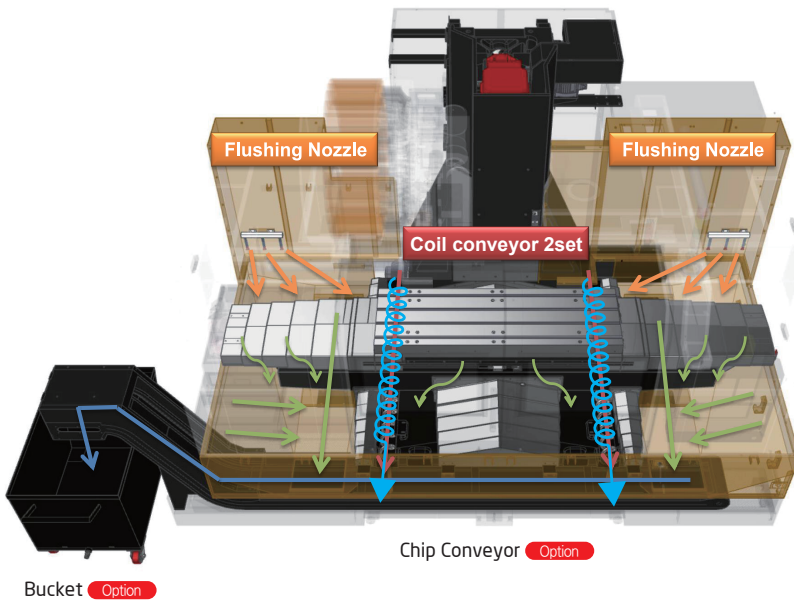


Complete chip discharge through the series of chip disposal processes by the coolant nozzle, bed flush, coil conveyor and chip conveyor

- the large, rectangular S/GUARD design and rear coolant tank ensures easy chip removal
- using bed flushing, complete chip disposal off the surface of the bed
- the chip conveyor can be installed in either the left or right direction according to the required layout for efficient chip disposal

## Automated Coolant Supply

Large capacity coolant tank located behind the machine enables easy coolant exchange, tank cleaning and pump maintenance

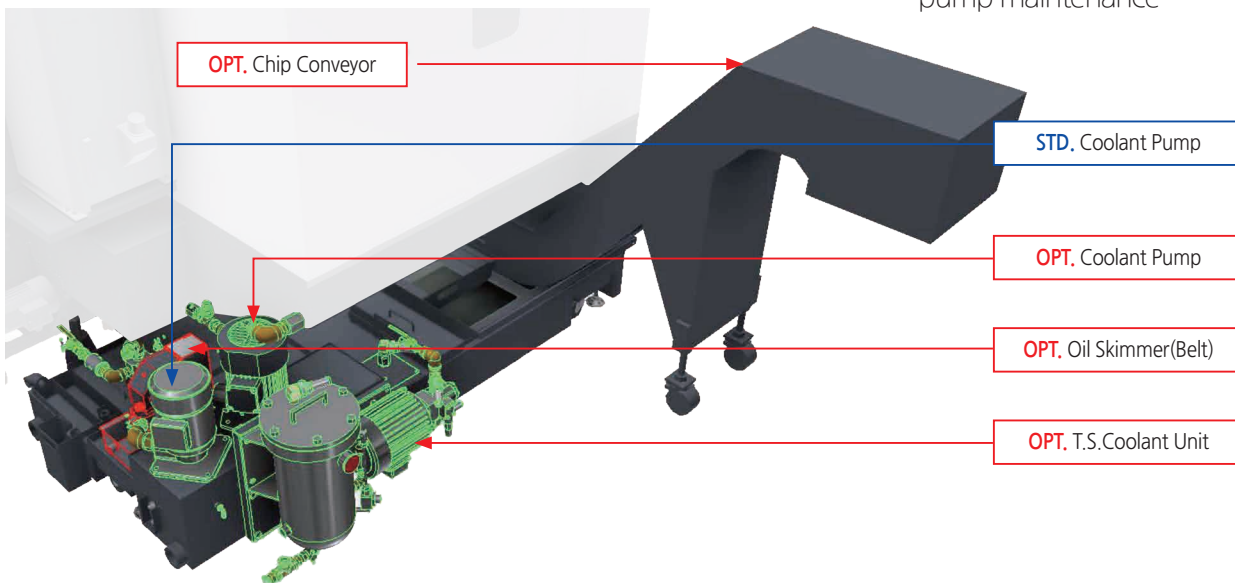

Coolant tank capacity : **105.67** gallons

# MCV 5700 Series

VERTICAL MACHINING CENTER

## Options


### Rotary Table and Air/Hyd Fixture Preparation

Components necessary for the installation of rotary table and fixtures may be added during assembly wherein hydraulic or pneumatic preparation may be selected.




### NC Rotary Table

When using an NC rotary table, multi-axis machining of diverse shapes is possible.

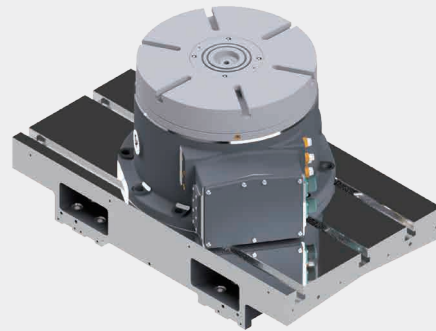

### Tool Measurement Probe

Various automated tool diameter, length and lifetime measuring devices may be installed.

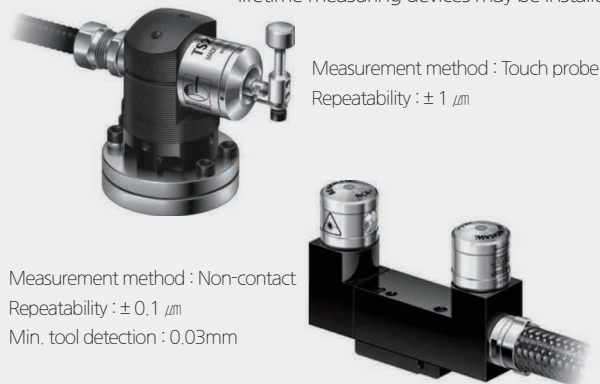


### Chip Conveyor

Equipment meant to remove chips created during machining




### High Column

When the distance between the table top and the spindle nose needs to be extended, such as to accommodate a fixture, a riser block may be added to extend the distance.

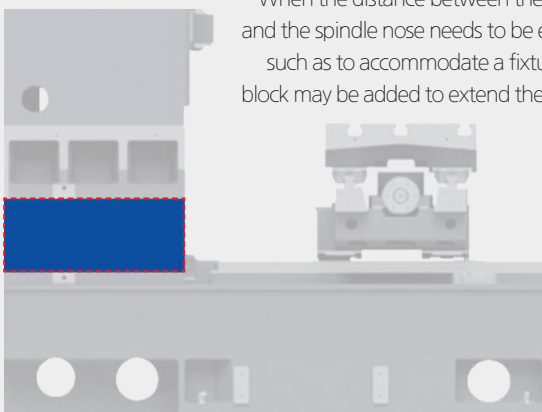

### Through Spindle Cooling (TSC)


The TSC option may be added to improve machining effectiveness

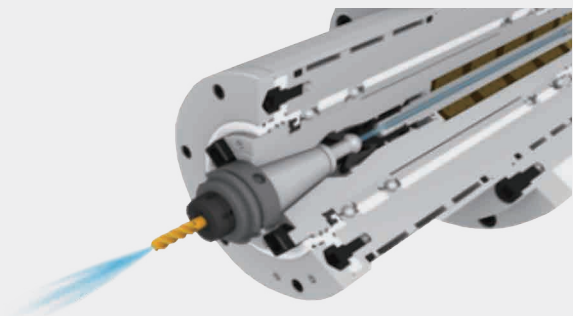

## Cutting Performance


### Face mill (Ø3.15inch) / Carbon steel (SM45C)

| Chip removal rate (inch <sup>3</sup> / min) | Spindle speed (r/min) | Feedrate (ipm) |
|---|-----------------------|----------------|
| 23.82                                       | 1,500                 | 106.30         |




### End mill (Ø1inch) / Carbon steel (SM45C)

| Chip removal rate (inch <sup>3</sup> / min) | Spindle speed (r/min) | Feedrate (ipm) |
|---|-----------------------|----------------|
| 2.71  | 1,528                 | 5.44           |




### U-Drill (Ø2.71inch) / Carbon steel (SM45C)

| Cutting rate (inch <sup>3</sup> / min) | Spindle speed (r/min) | Feedrate (ipm) |
|--|-----------------------|----------------|
| 13.90                                  | 1,500                 | 8.27           |



### Tap / Carbon steel (SM45C)

| Cutting rate (inch <sup>3</sup> / min) | Spindle speed (r/min) | Tap size (mm) |
|--|-----------------------|---------------|
| 8.35                                   | 742                   | M30×3.5       |





TEST conditions : 12,000rpm [BT40]

※ The above data is based on internal testing. Values may change depending on cutting conditions.


## Tool Shank

Unit : inch

### CAT40

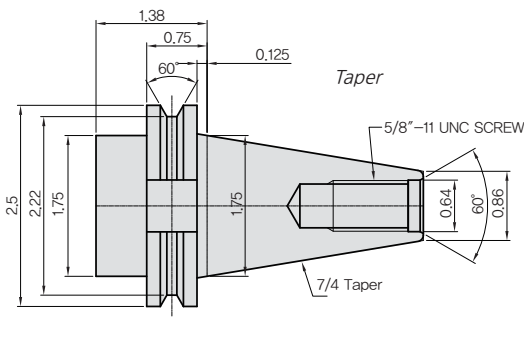

### PULL STUD

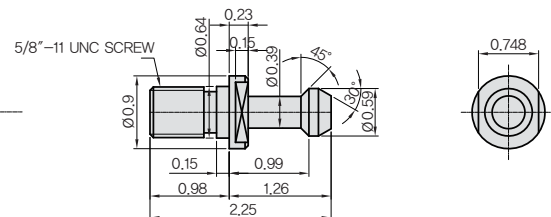

# MCV 5700 Series


VERTICAL MACHINING CENTER

## Spindle Power & Torque Diagram

Max Spindle Speed  
**12,000** rpm


Power(Cont/Max)  
**14.76/29.78** HP

Torque(Cont/Max)  
**51.71/104.30** lbs.ft

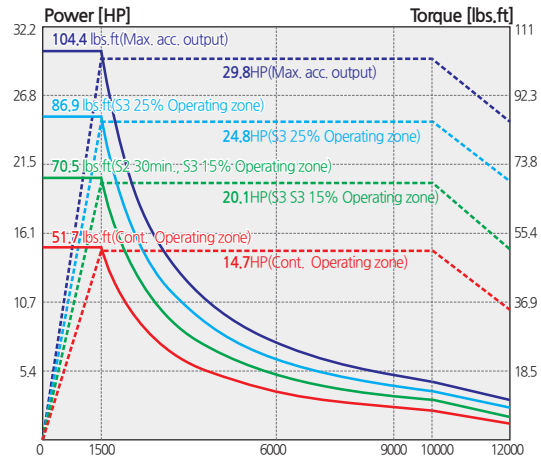


## Table & T-Slot

Unit : inch

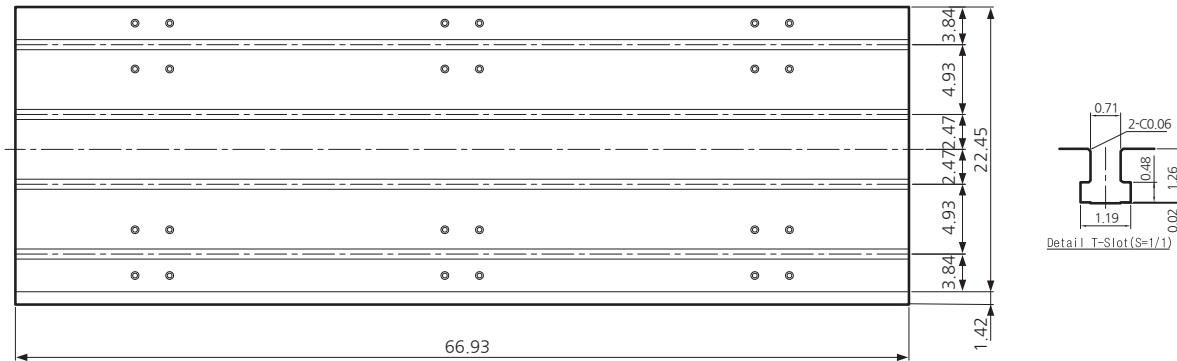


## ATC Interference


Unit : inch

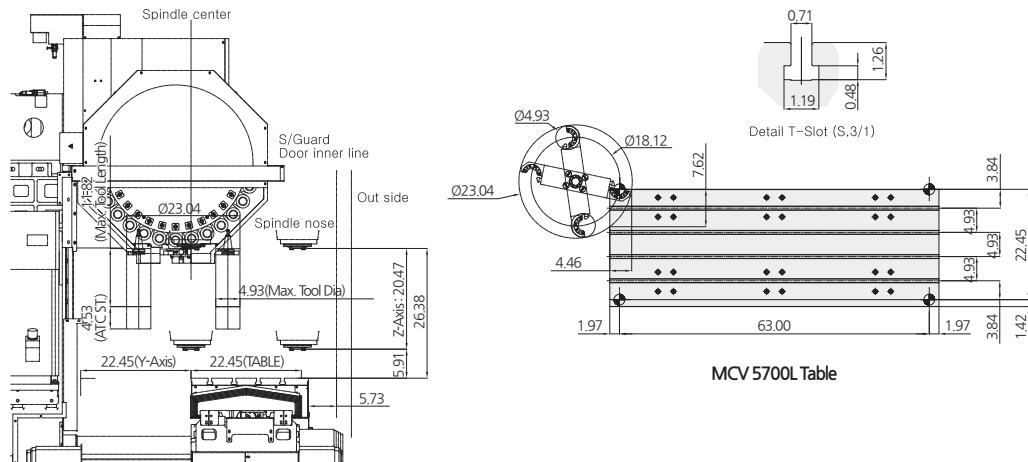

Top view

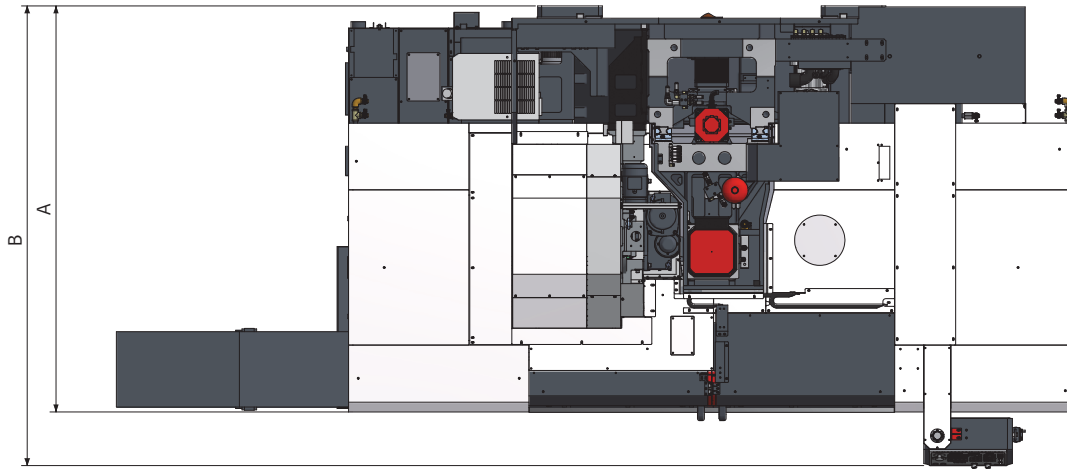

Front view

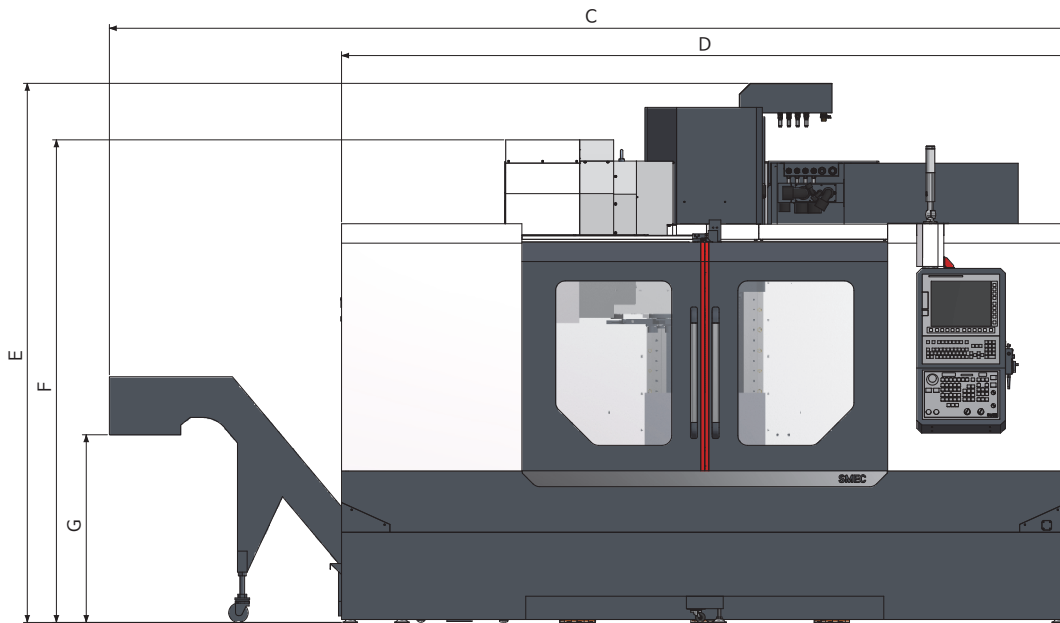

| Model     | A (Length) | B     | C      | D) (Width) | E (Height) | F     | G     |
|-----------|------------|-------|--------|------------|------------|-------|-------|
| MCV 5700  | 81.23      | 93.31 | 164.61 | 116.11     | 109.55     | 93.43 | 38.19 |
| MCV 5700L | 82.64      | 93.57 | 195.04 | 147.80     | 109.71     | 98.22 | 38.19 |


# MCV 5700 Series

VERTICAL MACHINING CENTER

## Machining Solution (STD)

# S4 (SMC SMOOTH SURFACE SYSTEM) Package

High performance NC options to improve machining performance provided as standard

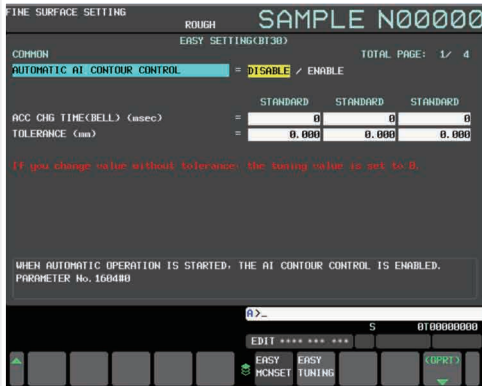

Without S4 Package



With S4 Package

|   |   |
|---|---|
| 15 inch LCD monitor standard            |   |
| AICC II (AI Contour Control II)         | Efficient accel/deceleration (200 block look ahead)     |
| Jerk control                            | Speed control during acceleration changes               |
| Smooth tolerance plus control           | Stable curved shape forming                             |
| Machining conditions selection function | Adjust accuracy level according to machining conditions |
| Machining quality selection function    |   |
| Manual Guide i                          | Visual machining check and setup guide                  |
| Data server                             | Transfer large program files                            |
| Part program storage                    | 2MB (5,120M)  |
| Number of registered programs           | 1,000ea   |

## IoT Solution (OPT)



NC-Gate Basic Platform

IoT-Gate Expansion Platform

### NC-Gate / IoT-Gate

The NC-Gate / IoT-Gate that was developed in-house with our ICT technology is a universal gateway that not only interworks with our machine tools, but machine tools from other manufacturers, robots, automation equipment, and analog / digital sensors as a network device capable of bi-directional communication.

Supported drivers : Fanuc / Mitsubishi / Siemens NC, Modbus TCP, DeviceNet, Profibus, Ethernet, AI/DI/DO



Provides key performance indicators and displays target achievement

- Indicators : achievement rate, productivity, process defect rate, equipment and factory usage, quality defect rate, lead time, and average cycle time



Provides figures and graphs of overall equipment effectiveness

- Availability, performance, quality, etc.



Provides operation status and alarm information in case of problems in the production line

- Provides information about the operation status, speed, production alarms, etc. of each machine



Remote control and operation

- Emergency stop switch, program editing, etc.



Problem diagnosis via remote control

- Provide remote diagnosis services to users via the IIoT solution



### Fanuc Oi MF Plus

- 15" LCD color display
- Part program size 2MB
- High quality designed OP Panel
- SMEC Custom S/W
- Portable M.P.G

SMEC Custom S/W displayed using MDI's button or OP Panel's button




◀ **CUSTOM** : Provide operator convenience and improve productivity using the support function for tool management and additional device setting.

### SMEC HMI




### M/G-Code check function

Allows the operator to directly read the M/G-Code on the machine for easy application programming

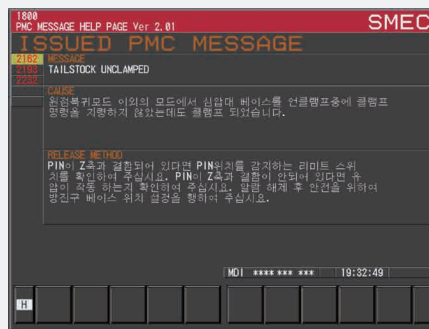


### PMC alarm check function

When a PMC alarm occurs, the cause and countermeasures are described in detail, making operation and maintenance more convenient

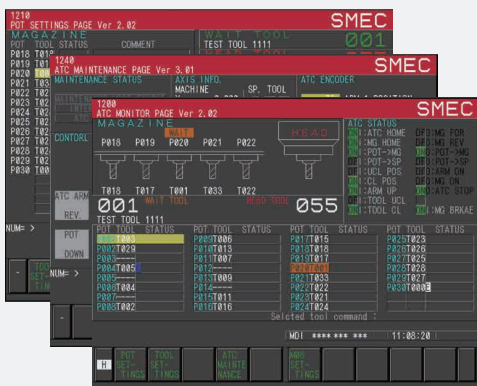

### ATC Magazine status check, setting and maintenance function

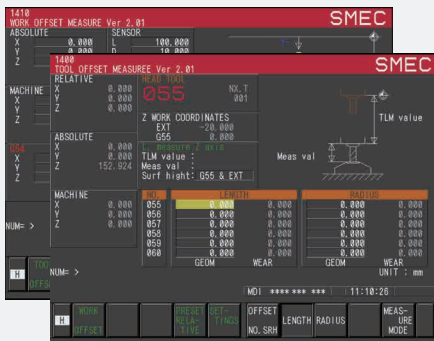

### Work coordinates, tool setting support function



### Counter for each T-Code

# MCV 5700 Series

## VERTICAL MACHINING CENTER

### Standard / Optional

● : Standard ○ : Optional X : N/A

| Category   |                 | MCV 5700 | MCV 5700L |
|--|-----------------|----------|-----------|
| <b>Spindle</b>   |                 |          |           |
| RPM  | 12R             | ●        | ●         |
|  | 15R             | ○        | ○         |
| Spindle chiller  |                 | ●        | ●         |
| <b>ATC</b>   |                 |          |           |
| Tool type  | BBT40           | ○        | ○         |
|  | CAT40           | ●        | ●         |
|  | HSK-A63         | X        | X         |
| Pull Stud  | 45°             | ●        | ●         |
| <b>Table &amp; Column</b>                              |                 |          |           |
| T-slot table   |                 | ●        | ●         |
| High column  | 200mm           | ○        | ○         |
|  | 300mm           | ○        | ○         |
|  | 400mm           | ○        | ○         |
| <b>Coolant Equipment</b>                               |                 |          |           |
| FULL SPLASH GUARD                                      |                 | ●        | ●         |
| Shower coolant   |                 | ○        | ○         |
| Coolant gun  |                 | ○        | ○         |
| Bed flushing   |                 | ○        | ●         |
| Air gun  |                 | ○        | ○         |
| Air blow   |                 | ○        | ○         |
| Tool measurement air blow (with tool measuring device) |                 | ○        | ○         |
| Internal screw conveyor                                |                 | ●        | ●         |
| Chip conveyor, HINGE                                   | Left            | ○        | ○         |
|  | Right           | ○        | ○         |
|  | rear            | X        | X         |
| Chip conveyor, SCRAPER                                 | Left            | ○        | ○         |
|  | Right           | ○        | ○         |
|  | rear            | X        | X         |
| Chip bucket  | STD (380ℓ)      | ○        | ○         |
|  | Rotating (200ℓ) | ○        | ○         |
| <b>Electrical Equipment</b>                            |                 |          |           |
| 3 step patrol lamp & buzzer                            |                 | ●        | ●         |
| Elec. cabinet light                                    |                 | ○        | ○         |
| Remote MPG   |                 | ○        | ○         |
| 3-axis MPG   |                 | ●        | ●         |
| Work counter   | GUI             | ●        | ●         |
| Total counter  | GUI             | ●        | ●         |
| Tool counter   | GUI             | ●        | ●         |
| Multi counter  | GUI             | ●        | ●         |
| Residual current breaker                               |                 | ○        | ○         |
| AVR (Auto Voltage Regulator)                           |                 | ○        | ○         |

| Category                               |            | MCV 5700 | MCV 5700L |
|--|------------|----------|-----------|
| <b>Electrical equipment</b>            |            |          |           |
| Transformer                            | 50kVA      | ○        | ○         |
| Auto Power Off                         |            | ○        | ○         |
| Power outage backup module             |            | ○        | ○         |
| Z-axis drop prevention                 |            | ●        | ●         |
| <b>Precision machining option</b>      |            |          |           |
| AICC II (AI Contour Control II)        |            | ●        | ●         |
| Jerk control                           |            | ●        | ●         |
| Smooth tolerance plus control          |            | ●        | ●         |
| Machining condition selection function |            | ●        | ●         |
| Machining quality selection function   |            | ●        | ●         |
| Data server                            |            | ●        | ●         |
| Manual guide i                         |            | ●        | ●         |
| <b>Measurement</b>                     |            |          |           |
| Workpiece contact check device         | TACO       | ○        | ○         |
|  | SMC        | ○        | ○         |
| Auto tool measuring device             |            | ○        | ○         |
| Tool breakage detection                |            | ○        | ○         |
| Linear scale                           | X-axis     | ○        | ○         |
|  | Y-axis     | ○        | ○         |
|  | Z-axis     | ○        | ○         |
| Coolant level detection                |            | ○        | ○         |
| <b>Environmental</b>                   |            |          |           |
| Air conditioner                        |            | ○        | ○         |
| Oil mist collector                     |            | ○        | ○         |
| Oil skimmer                            |            | ○        | ○         |
| <b>Fixture &amp; automation</b>        |            |          |           |
| Auto door                              | STD        | ○        | ○         |
|  | High speed | X        | X         |
| Auto shutter                           |            | X        | X         |
| Operation sub-console                  |            | ○        | ○         |
| NC rotary table                        |            | ○        | ○         |
| NC rotary table interface              |            | ○        | ○         |
| Rotary table control                   | 1 axis     | ○        | ○         |
|  | 2 axis     | ○        | ○         |
| Add. M-code (4 sets)                   |            | ○        | ○         |
| Robot interface                        |            | ○        | ○         |
| I/O expansion                          |            | ○        | ○         |
| <b>Hydraulic equipment</b>             |            |          |           |
| Hydraulic unit for fixtures            |            | ○        | ○         |
| <b>Safety device</b>                   |            |          |           |
| Door interlock                         |            | ●        | ●         |
| KCs                                    |            | ●        | ●         |

※ For detailed information, please contact your local SMEC dealer.



## Machine Specifications

| Category              |                                      |         | MCV 5700                                       | MCV 5700L                       |
|-----------------------|--------------------------------------|---------|--|---------------------------------|
| Travel                | X-axis travel                        | inch    | 41.34  | 63.00                           |
|                       | Y-axis travel                        | inch    | 22.45  | 22.45                           |
|                       | Z-axis travel                        | inch    | 20.48  | 20.48                           |
|                       | Spindle to table surface             | inch    | 5.91~26.38                                     | 5.91~26.38                      |
| Table                 | Table size                           | inch    | 51.19 × 22.45                                  | 66.93 × 22.45                   |
|                       | Table loading capacity               | lb      | 2,204.63                                       | 2,204.63                        |
|                       | Table surface                        | inch    | 0.71H8 × P4.93 × 4ea                           | 0.71H8 × P4.93 × 4ea            |
| Spindle               | Spindle speed                        | rpm     | 12,000   | 12,000                          |
|                       | Power                                | HP      | 14.7 / 20.1[30min] / 24.8[2.5min] / 29.8[max]  |                                 |
|                       | Torque                               | lbs.ft  | 51.7 / 70.5[30min] / 86.9[2.5min] / 104.4[max] |                                 |
| Feedrate              | X-axis rapid traverse rate           | ipm     | 1,147.33                                       | 1,181.11                        |
|                       | Y-axis rapid traverse rate           | ipm     | 1,147.33                                       | 1,147.33                        |
|                       | Z-axis rapid traverse rate           | ipm     | 1,181.11                                       | 1,181.11                        |
|                       | Cutting feed(X/Y/Z)                  | ipm     | 0.04~590.56                                    | 0.04~590.56                     |
| ATC                   | Tool shank                           | -       | BBT40(BT40)                                    | BBT40(BT40)                     |
|                       | Pull stud                            | -       | MAS P40T-1                                     | MAS P40T-1                      |
|                       | Tool storage capacity                | ea      | 30   | 30                              |
|                       | Max tool diameter (adjacent empty)   | inch    | 3.15(4.93)                                     | 3.15(4.93)                      |
|                       | Max tool length / weight             | inch/lb | 11.82/17.64                                    | 11.82/17.64                     |
|                       | Tool-to-tool time                    | sec     | 1.3(60Hz), 1.6(50Hz)                           | 1.3(60Hz), 1.6(50Hz)            |
|                       | Tool changing method                 | -       | Double Arm Swing                               | Double Arm Swing                |
|                       | Tool select type                     | -       | Memory random                                  | Memory random                   |
| Machine               | Size (with SIDE chip conveyor) L×W×H | inch    | 116.11(164.61) × 81.23 × 109.55                | 147.80(195.04) × 82.64 × 109.71 |
|                       | Size (with REAR chip conveyor) L×W×H | inch    | -  | -                               |
|                       | Weight                               | lb      | 14,770.98                                      | 15,432.36                       |
| Coolant tank capacity |                                      | gal     | 105.67   | 105.67                          |
| Electric power supply |                                      | kVA/V   | 32/220   | 32/220                          |
| Controller            |                                      |         | FANUC Oi-MF Plus                               | FANUC Oi-MF Plus                |

※ Design and specifications are subject to change without notice.

# MCV 5700 Series

VERTICAL MACHINING CENTER

## NC Specifications / FANUC Series

● : STD ○ : Optional ( ) : Option X : N/A



| Category                             |  | Oi-MF Plus              |
|--------------------------------------|--|-------------------------|
| Controlled axis                      | Controlled axes                              | X, Y, Z                 |
|                                      | Max simultaneously controlled axes           | 4                       |
|                                      | Least input increment                        | 0.001mm / 0.0001"       |
|                                      | Built-in stroke limit                        | Soft overtravel 1, 2, 3 |
|                                      | Machine lock                                 | ●                       |
| Operation function                   | Manual handle feed                           | X1, X10, X100           |
|                                      | Dry run                                      | ●                       |
|                                      | Single block                                 | ●                       |
|                                      | Feed per minute                              | G94                     |
|                                      | Feed per revolution                          | G95                     |
|                                      | DNC operation                                | Ethernet, CF card       |
|                                      | Retraction for rigid tapping                 | ●                       |
| Interpolation function               | Linear interpolation                         | G01                     |
|                                      | Circular interpolation                       | G02, G03                |
|                                      | Dwell  | G04                     |
|                                      | Cylindrical interpolation                    | G70.1                   |
|                                      | Skip   | G31                     |
|                                      | Fine surface machining                       | ●                       |
|                                      | Smooth tolerance control                     | ●                       |
|                                      | Nano smoothing                               | ●                       |
|                                      | Polar coordinate interpolation               | X                       |
|                                      | Reference position (zero) return             | G28                     |
|                                      | Reference position (zero) return check       | G27                     |
| 2nd, 3rd, 4th reference point return | G30  |                         |
| Feed function                        | Rapid traverse override                      | F0, 25%, 50%, 100%      |
|                                      | Feedrate override                            | 0~200%                  |
|                                      | Jog override                                 | 0 ~ 5,000 mm/min        |
|                                      | AI look ahead                                | 20 block                |
|                                      | AI contour control II                        | 200 block               |
|                                      | Look ahead block expansion (F0i) (400 Block) | ○                       |
|                                      | High-speed processing                        | X                       |
|                                      | Look ahead block expansion (F31i)            | X                       |
|                                      | Jerk Control                                 | ●                       |
| Spindle function                     | Spindle orientation                          | ●                       |
|                                      | Rigid tapping                                | M29                     |
|                                      | Spindle override                             | 50 ~ 150%               |
| Tool function                        | Tool number command                          | T2-Digt Tool number     |
|                                      | Tool nose radius compensation                | G40 ~ G42               |
|                                      | Tool offset pairs                            | 400 pairs               |
|                                      | Tool geometry / wear offset                  | ●                       |
|                                      | Tool length offset                           | ●                       |
|                                      | Tool life management                         | ●                       |
| Tool path graphic display            | ●  |                         |



| Category                                | Oi-MF Plus                                |                                      |
|---|---|--------------------------------------|
| Program input                           | Absolute / incremental command            | G90/G91                              |
|   | Repeating canned cycle                    | X                                    |
|   | Repeating canned cycle 2                  | X                                    |
|   | Canned cycles                             | X                                    |
|   | Drilling canned cycle                     | G73/74/76, G80~89                    |
|   | Decimal point input                       | ●                                    |
|   | Inch / metric conversion                  | G20 / G21                            |
|   | Program restart                           | ●                                    |
|   | Sub program call                          | ●                                    |
|   | Max programmable value                    | ±99999.999mm/±9999.9999"             |
|   | M function                                | 3 digit                              |
|   | Custom macro                              | ●                                    |
|   | Addition of custom macro common variables | #100~#199, #500~#999 (#98000~#98499) |
|   | Programmable data input                   | G10                                  |
|   | Tape code                                 | ISO / EIA                            |
|   | Optional block skip                       | ●                                    |
| Workpiece coordinate system             | G52 ~ G59                                 |                                      |
| Addition of workpiece coordinate system | 48(300) pairs                             |                                      |
| Interface function                      | Embedded ethernet                         | ●                                    |
|   | Fast ethernet                             | 100 Mbps                             |
| Setting and display                     | Alarm and operator history display        | ●                                    |
|   | Run hour and parts count display          | ●                                    |
|   | Loadmeter display                         | ●                                    |
|   | Self diagnosis function                   | ●                                    |
|   | Extended part program editing             | ●                                    |
|   | Machining condition selecting function    | ●                                    |
|   | Machining quality level adjustment        | ●                                    |
|   | Display screen                            | 15" LCD                              |
|   | Multi-language display                    | 25 language                          |
| Data input/output                       | Fast data server                          | ○                                    |
|   | RS232C interface                          | ●                                    |
|   | Memory card input / output                | ●                                    |
|   | USB memory input / output                 | ●                                    |
| Editing operation                       | Part program storage size                 | 2MB                                  |
|   | Number of registered programs             | 1,000EA                              |
|   | Manual guide i                            | ●                                    |
|   | Manual guide Oi                           | ○                                    |



14 West Forest Avenue Englewood, NJ 07631 USA  
Office: +1 201-227-7632  
Email: [sales@smecamerica.com](mailto:sales@smecamerica.com)

[www.smecmachinetools.com/eng](http://www.smecmachinetools.com/eng)  
[www.youtube.com/smecmachinetools](http://www.youtube.com/smecmachinetools)



❖ Design and specifications subject to change without notice.

© SMEC 2022.02-NO.1

